



# E7

# 534A

## PBT, PET用短切原丝 Chopped Strands For PBT, PET

E7-534A是增强热塑性塑料用短切原丝，基于高强高模E7配方，表面涂覆硅烷基浸润剂，适用于增强PBT、PET。

E7-534A适用的成型工艺是注射法和挤出法，主要用于汽车工业、电子电气等。产品通过FDA认证，可用于食品容器。

E7-534A Chopped Strands are designed for thermoplastics application. With high strength and tensile modulus, they are coated with a silane-based sizing compatible with PBT and PET. E7-534A are designed for use in injection and extrusion processes and used in automotive, electric and electronic applications. The product is FDA certified and can be used in food containers.

### 产品特点

- ◎ 原丝集束性好、静电小、流动性好
- ◎ 与树脂结合性好，制品表面纤维不外露，外观质量优
- ◎ 复合材料机械性能优异
- ◎ 更高强度，更高模量

### Product Features

- ◎ Good strand integrity, low static and good flowability.
- ◎ Good bonding with resins. No fiber sticking out on parts surface and good aesthetic appearance of parts.
- ◎ Excellent mechanical properties of composite.
- ◎ More high tensile strength and modulus.

### 规格代号 Identification:

代号示例 Example	E7CS10-03-534A
玻璃类型 Glass Type	E
短切原丝 Chopped Strands	CS
纤维直径 Filament Diameter(μm)	10
短切长度 Chop Length(mm)	03
浸润剂代号 Size Code	534A




### 技术指标 Technical Parameters

纤维直径 Filament Diameter(μm)	含水率 Moisture Content(%)	可燃物含量 Size Content (%)	短切长度 Chop length (mm)	短切率 Choppability(%)
ISO 1888	ISO 3344	ISO 1887	Q/JS J0361	Q/JS J0362
± 10	≤ 0.07	0.70 ± 0.15	± 1.0	≥ 99

### 贮存 Storage

在没有特殊要求的情况下，玻璃纤维产品应贮存在干燥、凉爽的地方，防止受潮。建议保持室内温度平衡，最佳存储条件为温度-10°C ~ 35°C，相对湿度≤80%。本产品产品在12个月内使用最佳，使用前应保持在原包装内，为确保安全，避免损坏产品，托盘的堆码高度不应超过三层。当堆放两层或三层高时，要求正确地、平稳地移动上面的托盘。

Unless otherwise specified, the fiberglass products should be stored in a dry, cool and moisture-proof area. The fiberglass products should remain in their original package until prior to use. The room temperature and humidity should be always maintained at -10°C~35°C and ≤80% respectively. To ensure safety and avoid damage to the product, the pallets should not be stacked more than three layers high. When the pallets are stacked in 2 or 3 layers, special care should be taken to correctly and smoothly move the top pallet.

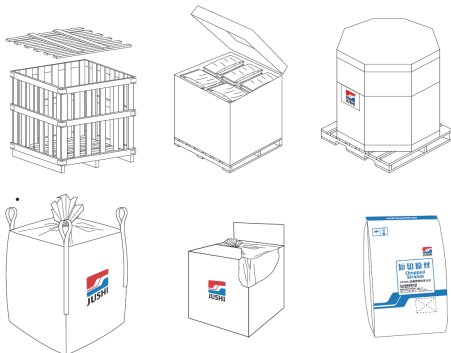

### 包装信息 Packaging

\* 采用集装袋包装、纸箱包装、复合编织袋包装、木条箱包装、重型箱包装、八角箱包装、例如：  
集装袋可装500kg ~ 1000kg；纸箱包装和复合编织袋可装15kg ~ 25kg  
The product can be packed in bulk bags, cardboard boxes, wooden crates, heavy-duty box, octagonal box and composite plastic woven bags;  
For example: Bulk bags can hold 500kg-1000kg each; Cardboard boxes and composite plastic woven bags can hold 15kg-25kg each.

#### 集装袋尺寸 Bulk bag

长度 Length mm (in)	1030 (40.55)
宽度 Width mm (in)	1030 (40.55)
高度 Height mm (in)	1100 (43.31)

#### 纸箱包装尺寸 Carton box

长度 Length mm (in)	355 (13.98)
宽度 Width mm (in)	355 (13.98)
高度 Height mm (in)	270 (10.63)

#### 复合编织袋尺寸 Composite plastic woven bag

长度 Length mm (in)	850 (33.46)
宽度 Width mm (in)	500 (19.68)
高度 Height mm (in)	120 (4.72)

中国巨石股份有限公司 CHINA JUSHI CO., LTD.

版权所有 © 巨石集团有限公司 巨石集团有限公司注册商标

地址: 浙江省桐乡经济开发区, 邮编: 314500 Add: Tongxiang Economic Development Zone, Zhejiang 314500, China

(国内销售 Domestic Sales) 电话Tel:+86-573-88181016 传真Fax:+86-573-88136248  
(国际销售 International Sales) 电话Tel:+86-573-88136318 传真Fax:+86-573-88181058  
(客户服务 Customer Service) 电话Tel:+86-573-88136325 传真Fax:+86-573-88136248

http://www.jushi.com E-mail: info@jushi.com